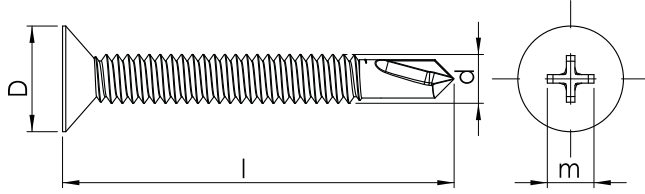
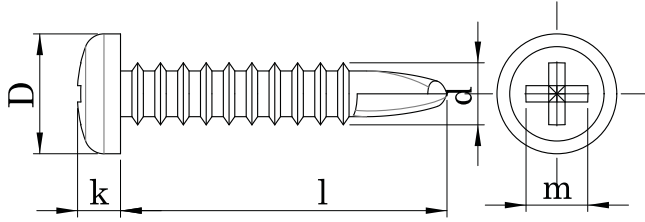


**DIN 7504P****YILDIZ HAVŞA BAŞLI MATKAP UÇLU VİDA  
CROSS RECESSED COUNTERSUNK HEAD SELF DRILLING SCREW  
SELBSTBOHRENDE SCHRAUBE MIT SENKKOPF****Technical Informations / Teknik Bilgiler**

Thread size / Anma çapı (d)	3,9	4,2	4,8	
D	7,50	8,10	9,50	
m	4,60	4,70	5,10	
ph	2,00	2,00	2,00	
Thread size / Anma çapı (d)				
Drill range / Delme kapasitesi	min	0,70	0,70	1,75
	max	2,40	3,00	4,40

Thread size / Anma çapı (d)			3,9	4,2	4,8
Length / Boy (l)	min.	max.	Weight / Ağırlık gr/p		
13	12,20	13,50	0,90	1,12	1,80
16	15,20	16,50	1,05	1,35	1,85
19	18,20	19,70	1,27	1,53	2,15
22	21,20	22,70	1,35	1,73	2,30
25	24,00	26,00	1,60	1,95	2,55
32	30,80	32,60	1,91	2,30	3,25
38	37,00	39,00	2,30	2,82	3,72
45	43,40	45,40		3,20	4,35
50	49,50	51,50		3,65	4,81
60	58,80	61,20			5,65
70	68,80	71,20			6,45
80	78,80	81,20			7,38
90	88,90	91,20			8,30
100	98,80	101,20			9,18

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.

**DIN 7504 N****YILDIZ SİLİNDİR BAŞLI MATKAP UÇLU VİDA (YSB)  
CROSS RECESSED PAN HEAD HEAD SELF DRILLING SCREW  
SELBSTBOHRENDE SCHRAUBE MIT LINSENKOPF****Technical Informations / Teknik Bilgiler**

d	3,9	4,2	4,8
D	7,5	8,2	9,5
k	2,8	3,05	3,55
m	4,4	4,6	5
ph	2	2	2

Thread size / Anma çapı (d)		3,9	4,2	4,8
Drill range / Delme kapasitesi	min.	0,70	1,75	1,75
	max.	2,40	3,00	4,40

Thread size / Anma çapı (d)			3,9	4,2	4,8
Length / Boy (l)	min.	max.	Weight / Ağırlık gr/p		
13	12,10	13,90	5,80	4,30	3,70
16	15,10	16,90	8,80	7,30	5,80
19	18,00	20,00	11,70	10,30	8,70
22	21,00	23,00	14,70	13,30	11,70
25	24,00	26,00	17,70	16,30	14,70
32	30,75	33,25	24,50	23,00	21,50
38	36,75	39,25	30,50	29,00	27,50
45	43,75	46,25			34,50
50	48,75	51,25			39,50
60	58,80	61,20			6,21
70	68,80	71,20			7,06
80	78,80	81,20			7,85
90	88,80	91,20			8,80
100	98,80	101,20			9,62

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.