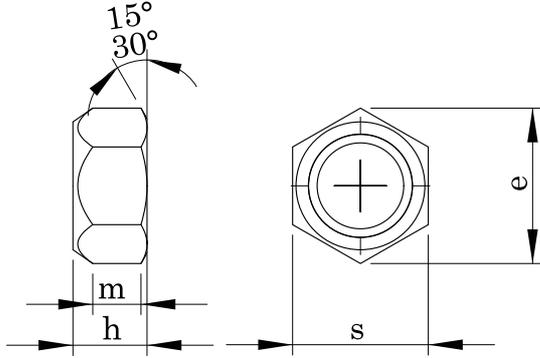


DIN 980/V ISO 7042**SIKMALI ALTI KÖŞE SOMUN****PREVAILING TORQUE TYPE HEXAGON NUT , ALL METAL
SICHERUNGSMUTTER (GANZMETALLMUTTER)****Technical Informations / Teknik Bilgiler**

Thread size / Anma çapı (d)		M6	M8	M10	M12	M14	M16	M18	M20
	P ₁	M8x1,00 M10x1,00 M12x1,50 M14x1,50 M16x1,50 M18x2,00 M20x1,50							
Pitch / Diş adımı	P ₂	M10x1.25 M12x1,25				M18x1,50 M20x2,00			
	P ₃	1,00	1,25	1,50	1,75	2,00	2,00	2,50	2,50
Flange dia / Flanş çapı	da min.	6,00	8,00	10,00	12,00	14,00	16,00	18,00	20,00
	da max.	6,75	8,75	10,80	13,00	15,10	17,30	19,50	21,60
	dw min.	8,90	11,60	15,60	17,40	20,50	22,50	24,90	27,70
Diagonal / Köşegen	e min.	11,05	14,38	18,90	21,10	24,49	26,75	29,56	32,95
	e max.	11,05	14,38	18,90	21,10	24,49	26,75	29,56	32,95
Height / Yükseklik	h min.	5,70	7,50	9,00	11,00	12,00	14,00	16,00	18,00
	h max.	6,00	8,00	10,00	12,00	14,00	16,00	18,00	20,00
	m	3,30	4,40	5,50	6,60	7,70	8,80	9,90	11,00
Head width / Anahtar ağız s	s min.	9,78	12,73	16,73	18,67	21,67	23,67	26,16	29,16
	s max.	10,00	13,00	17,00	19,00	22,00	24,00	27,00	30,00
Weight / Ağırlık	gr/p	2,90	6,00	11,70	16,60	21,00	37,80	54,4	69,80

Values are given in millimeters. / Değerler milimetre olarak verilmiştir.